


# O2100F-01

## RF Combiner Module

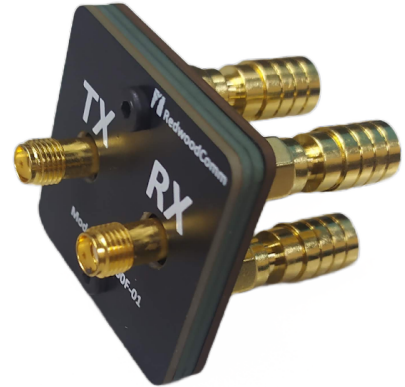

### FEATURES


- 3 Way-0°, 50 ohm
- wideband, 500kHz to 300 MHz
- high isolation, 35 dB typ.

### Specifications

Freq. (MHz)	Isolation (dB)						Insertion Loss (dB)						Phase Unbalance (Degrees)			Amplitude Unbalance (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
0.5~300	40	23	35	20	27	18	5.5	5.8	5.2	5.8	5.6	6.3	1	4	6	0.2	0.3	0.5

L=0.5~10MHz, M=10~150MHz, U150~300MHz

### Outline Drawing

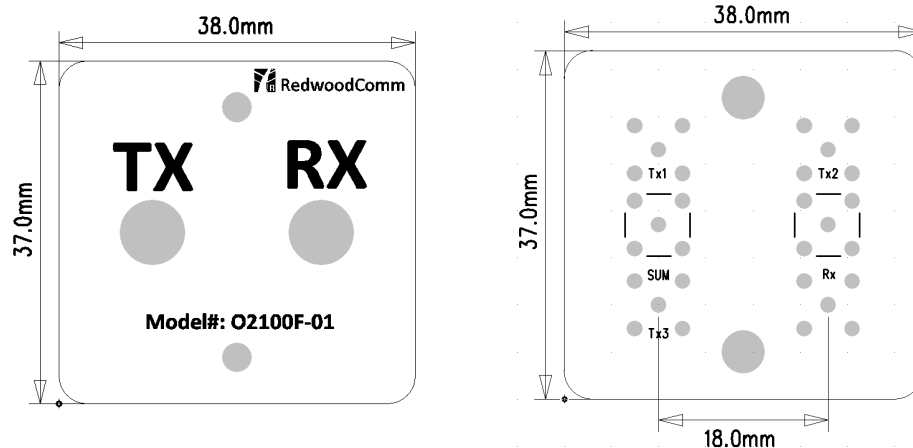

### Ordering Information

O2100F-01 : RF Combiner Module  
3:1 Combiner for TX Ports

### CONTACT

sales@redwoodcomm.com  
<https://www.redwoodcomm.com/>